

# FARMALL C





# COMPACT OUTSIDE BIG ON THE INSIDE

## AFTER MORE THAN 170 YEARS WE REMAIN TRUE TO OUR VISION OF PROVIDING THE FARMERS OF TOMORROW WITH AGRICULTURAL MACHINERY THAT IS ALWAYS AN INNOVATIVE, RELIABLE AND PROFITABLE INVESTMENT

For more than 170 years Case IH has played a major role in shaping agriculture, with legendary brand names that include Case IH, International Harvester and David Brown. As the inventor of the power take-off, Axial-Flow® single rotor threshing and the hydraulic reversing gear, and as the pioneer of the continuously variable transmission, the Case IH heritage goes on. The pioneering vision of our forebears remains at the heart of every Case IH product to this day. It is with the same passion that we develop and produce agricultural machinery in Europe and across the world. The Case IH tractors in operation are testament to our dedication to meeting and exceeding the expectations of farmers around the globe.

This wealth of experience has given us the opportunity to listen to you and design products that deliver precisely what you need. Our drive for innovation has led us to devise advanced technological solutions to constantly drive up our machines' performance and productivity whilst making them easy to use and increasingly profitable. We strive tirelessly for perfection, achieving high quality in everything, down to the smallest detail. We demand of ourselves and our dealers the same high level of quality in the service we provide together to our customers. Our network of 391 dealers, 679 dealer branches and sub-dealers and 1,377 Case IH service centres in Europe is your guarantee of personalised and professional service.

### FARMALL C — MADE FOR VERSATILITY

The Farmall C can take care of your farmyard jobs, easily moving in and around buildings, and put in a full day's work in the field. At home on grassland, dairy, livestock, arable, poultry and vegetable farms, this versatile utility tractor is equally capable in parks and botanical gardens.

If you have been looking for an all-rounder, but think smaller tractors lack the specifications of their heavier stable mates, look again – at the Case IH Farmall C! From simple mechanical entry level to 2-speed Powershift and Powershuttle a wide range of transmissions are available. This low clearance, high energy performer combines the best of compact utility tractor engineering with the advanced technological features you will be familiar with from larger machines, and have come to expect from Case IH.

MODELS	Rated power ECE R120 <sup>1)</sup> @ 2,300 rpm (kW/hp(CV))	Maximum torque ECE R120 <sup>1)</sup> @ 1,500 rpm (Nm)	Number of cylinders / Capacity (cm <sup>3</sup> )	Fuel consumption @ 1,900 rpm (g/kWh)	Approximate shipping weight (kg)
Farmall 55 C	43 / 58	244	4 / 3,400	237	2,880
Farmall 65 C	48 / 65	275	4 / 3,400	237	2,880
Farmall 75 C	55 / 75	309	4 / 3,400	236	2,880
Farmall 85 C	63 / 86	351	4 / 3,400	217	3,600
Farmall 95 C	73 / 99	407	4 / 3,400	217	3,600
Farmall 105 C	79 / 107	444	4 / 3,400	218	3,600
Farmall 115 C	84 / 114	457	4 / 3,400	219	3,600

<sup>1)</sup> ECE R120 correspond to ISO 14396 and 97 / 68 / EC or 2000 / 25 / EC

# THE FARMALL C RANGE COMPACT AND VERSATILE

## EXPERIENCE EASE OF USE, COMFORT AND VERSATILITY EVERY DAY WITH THE FARMALL C RANGE TRACTORS

With an extensive range of factory options, Farmall C tractors are ready for all kinds of agricultural, municipal and industrial tasks. Various options for tyres, hydraulic connections, front linkage and loader allow for a broad spectrum of jobs to be performed.



### SPACIOUS AND COMFORTABLE INSIDE

Wide opening glass doors and a full height cab entrance make it easy to enter the cab from either side. Ergonomic design with a driver seat that is fully adjustable, a foldable and comfortable passenger seat, flat floor, low noise level and the option of air conditioning add up to make the Farmall C a joy to drive.



### INTUITIVE AND EFFICIENT CONTROLS

The controls are laid out logically, so that operation becomes instinctive, making the Farmall C suitable for casual drivers as well as owner operators. All frequently used controls, such as gear lever, hand throttle and the optional integrated loader joystick, are placed within easy reach on the right hand console. The instrumentation cluster adjusts with the steering wheel and combines analogue gauges with digital displays for optimum overview.



### SURROUND VISION AND HIGH-VISIBILITY ROOF WINDOW

The Farmall C is designed to provide unsurpassed sight lines with unobstructed views of the work area and implements. An opening high-visibility roof window provides excellent visibility for loader work. The fully adjustable work lights, integrated into the roof for protection, will give you all the lighting you need to keep working after dark. As an option, the Farmall C is also available as a platform version with foldable ROPS frame instead of a cabin.

### ADVANTAGES

- Low cab height of under 2.5 m on 16.9R30 tyres
- High power to weight ratio
- Travel speeds from 200 metres per hour to 40 kph
- Available in 2 wheel drive or 4 wheel drive





### **EFFICIENT POWER FOR BEST RESULTS**

Proven turbocharged engines with high-pressure common rail injection technology deliver more power at reduced fuel consumption. All models meet Stage IIIB emissions standards with an exhaust after-treatment system. Electronic fuel delivery ensures fast acceleration, more torque and constant maximum power.



### **THE RIGHT TRANSMISSION TO MEET YOUR NEEDS**

You can choose between the simplicity of manual gear selection or low effort hydraulic operation. The assertive mechanical transmission offers 12 forward and 12 reverse gears with 40 kph, and is also available with Powershuttle. The four models of the range are also available with a two-speed Powershift that doubles the number of available speeds to 24 forward and 24 reverse, plus Powerclutch and Powershuttle. Low speed creeper gears are available on all transmissions.



### **VERSATILE HYDRAULICS FOR A HEAVY LIFTER**

With a rear linkage capacity up to 3,700 kg and separate hydraulic circuits for steering and external services, Farmall C is never short on ability. With a choice of up to three rear and two mid-mounted hydraulic remote valves, hydraulic flow can be directed as required to control a wide range of equipment. The Farmall C comes ready for perfect front loader operation.




### **PTO SPEEDS FOR MAXIMUM VERSATILITY**

Choice of PTO speeds from simple 540 to 540E/1,000, including ground speed PTO and a new power curve that is perfectly aligned to PTO work, the Farmall C puts you in a position to handle the work of all seasons. Furthermore, the rated speed of the PTO has been adapted to a lower and more efficient engine speed.



### **A CHOICE OF TYRES TO SUIT YOUR APPLICATION**

Farmall C can be specified with factory fitted wide low ground pressure tyres for fine turf work on golf courses, non-aggressive turf patterns for sports pitches, industrial block pattern tyres for continual road work or conventional agricultural tyres. With a large choice of tyres, four wheel drive and 100% differential lock on both front and rear axles, the power is put to the ground for ultimate productivity.

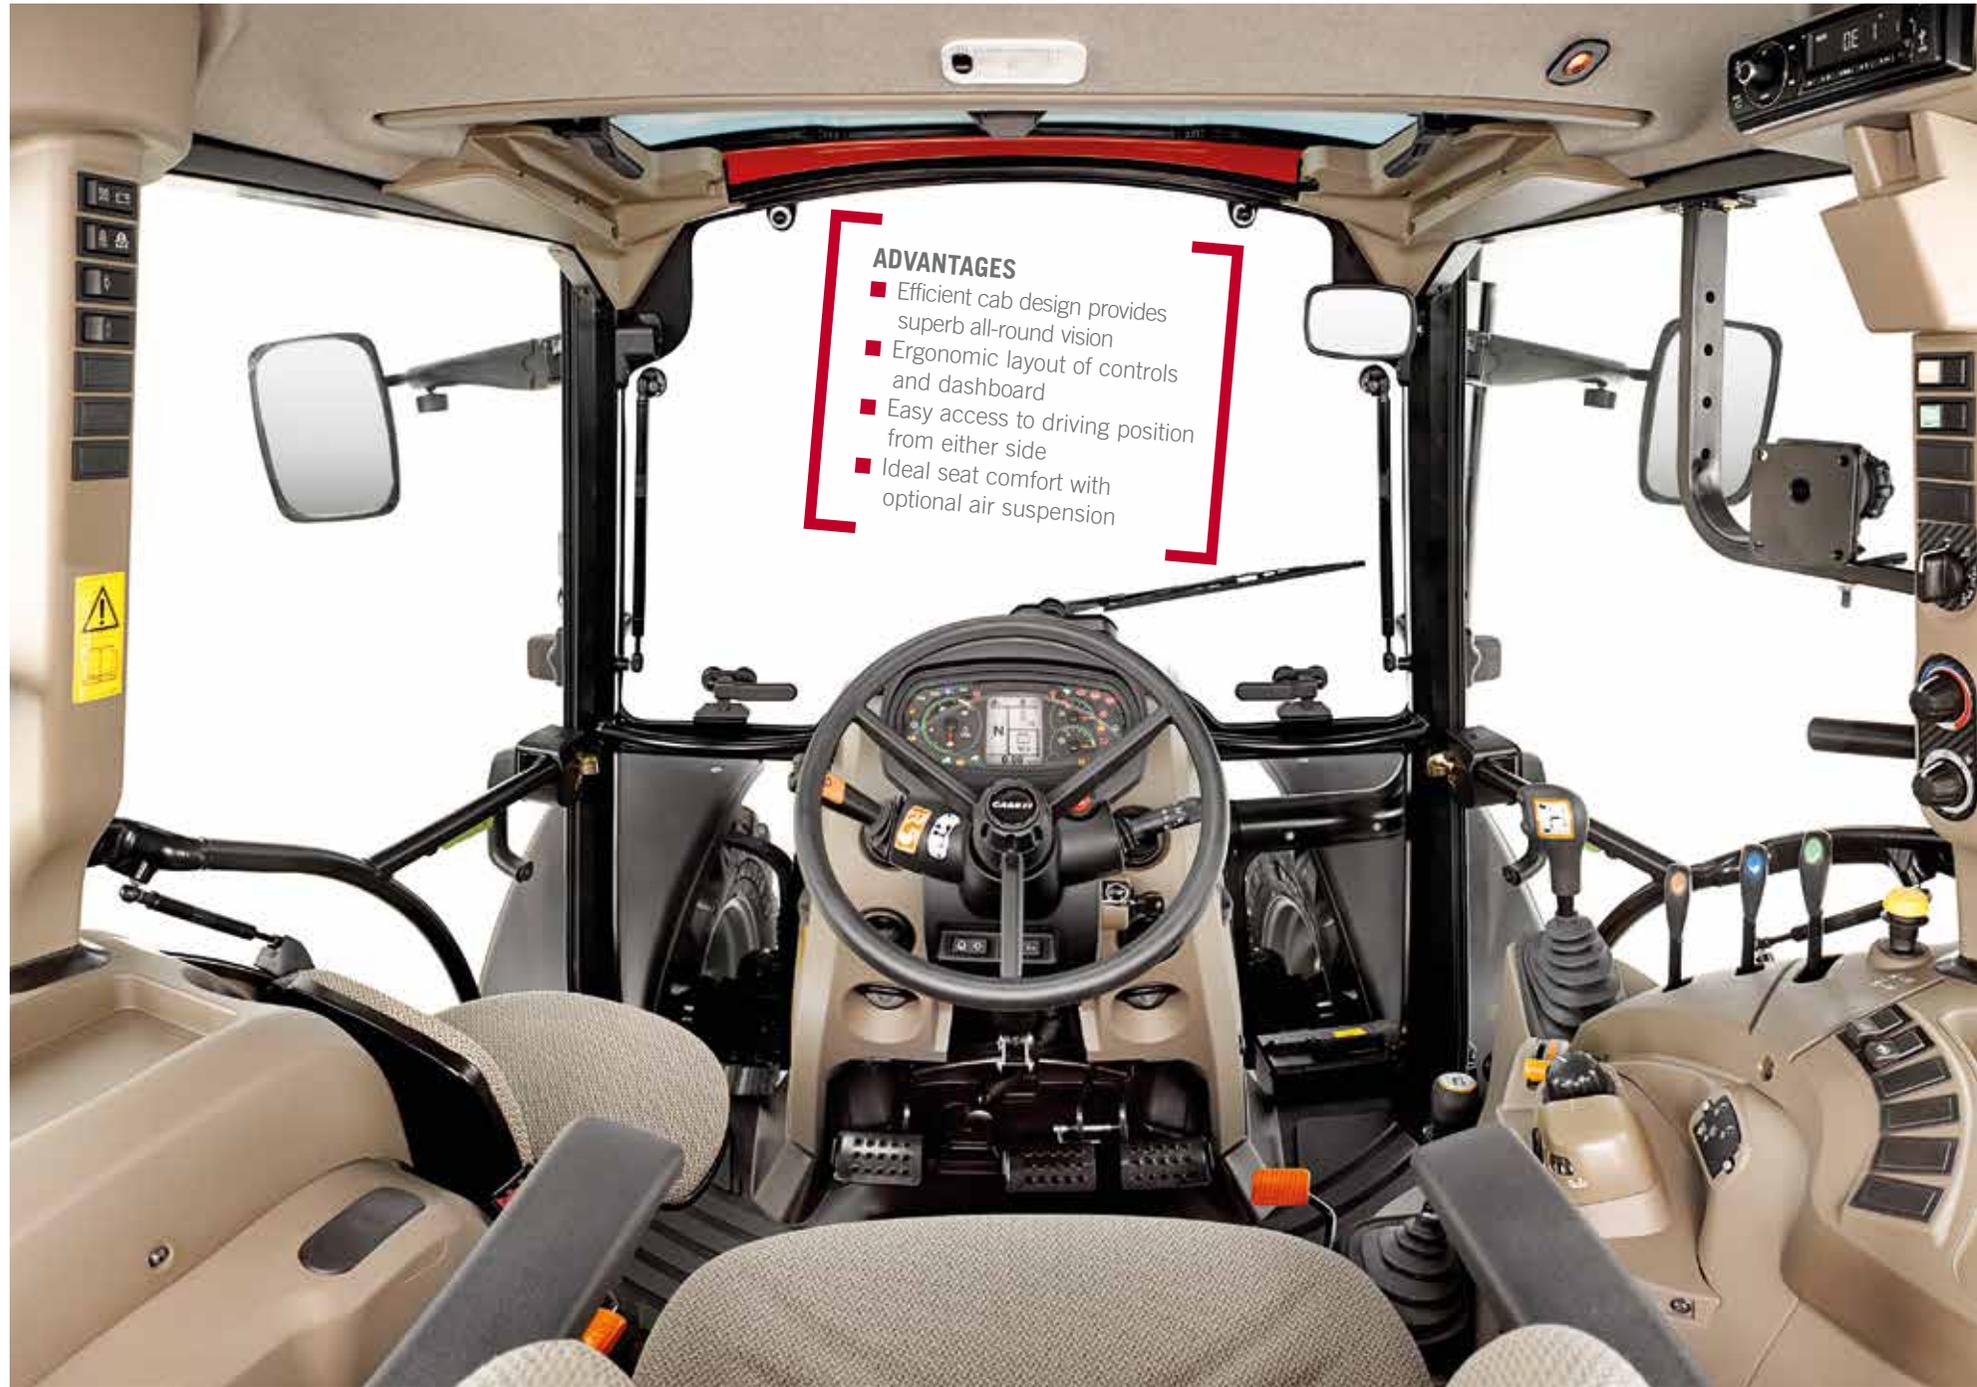

**ADVANTAGES**

- Efficient cab design provides superb all-round vision
- Ergonomic layout of controls and dashboard
- Easy access to driving position from either side
- Ideal seat comfort with optional air suspension

# CAB AND CONTROLS WELCOME TO YOUR COMFORT ZONE

The cab or open station platform offers a high-comfort workplace; the comfortable seat, ergonomic controls layout and quiet operation will leave you refreshed at the end of a long day's work. The excellent surround vision and high visibility roof window will make your day more productive; the flat floor and the wide doors for easy entry and exit on either side will make it easy to run errands around the farm.

## THE COMFORT ZONE

The roomy cab provides the perfect working environment with all the comfort features of its bigger brothers. Climb in, sit down, shut the door, start the engine; you will be amazed at how quiet it is and you will enjoy a driving comfort that makes day-long multitasking a pleasure. On open station versions large grab handles and a flat floor make access easy whilst an ISO mounted platform smooths the shocks from rough terrain.

## THE PERFECT WORK STATION

All essential controls are logically positioned and within easy reach to make time spent at work more comfortable and more productive. You will find it easy to stay focused with all the controls you use most frequently, such as gear lever, remote levers, hand throttle and the optional integrated loader joystick, close together and within easy reach on the right hand console. The instrumentation cluster combines analogue gauges with digital displays to best effect – and you have full control of all the information you need to get the job done.

## IDEAL CONDITIONS

The improved airflow for the heating and air conditioning systems will make it easy for you to create the ideal environment inside the cab to work in comfort all year round, and in all weather conditions.

## SITTING COMFORTABLY

You won't feel tired at the end of a long working day in your Farmall C tractor. The comfortable seat is easily adjustable and the suspension smoothes out the shocks when driving on rough terrain or during road transport. As an option, cab versions can be specified with a comfortable folding passenger seat.

## DAY AND NIGHT

Work as late as you need to finish the job; with six fully adjustable work lights and a flashing beacon for road work, you can stay on until everything is sorted.



# ECONOMIC ENGINE MANAGEMENT

WITH CASE IH, EFFICIENT POWER BEGINS WITH OUTSTANDING INDIVIDUAL COMPONENTS.

## DOING MORE WITH LESS

The FPT 4-cylinder Common Rail engine does not need to be driven at rated speed to perform; it delivers full power at a fuel-saving 1,800 rpm (55 C - 75 C) and 1,900 rpm (85 C - 115 C). This not only keeps fuel consumption down in all applications, it also results in high operating comfort due to the lower noise and vibration levels.

## POWER IS NOT EVERYTHING

FPT's engine development team has devoted much attention and time to perfectly match the torque characteristics of the F5C engines to real working conditions. The result is impressive; a maximum torque of 457 Nm is reached at a fuel-saving 1,500 rpm, making the Case IH Efficient Power truly economic.


### ADVANTAGES

- Maximum performance at low engine speed:
  - lower fuel consumption
  - reduced vibrations
  - easy on tractors and implements
- Low idle speed of 700 rpm:
  - lower fuel consumption
- 600 hour service interval






### FARMALL 75 C

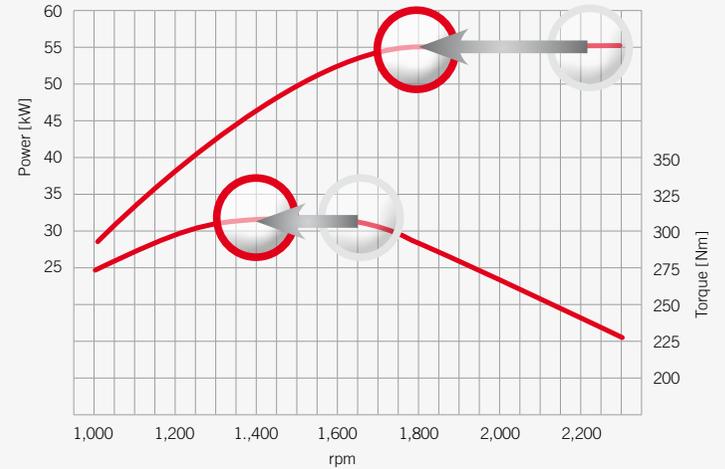

### FARMALL 115 C

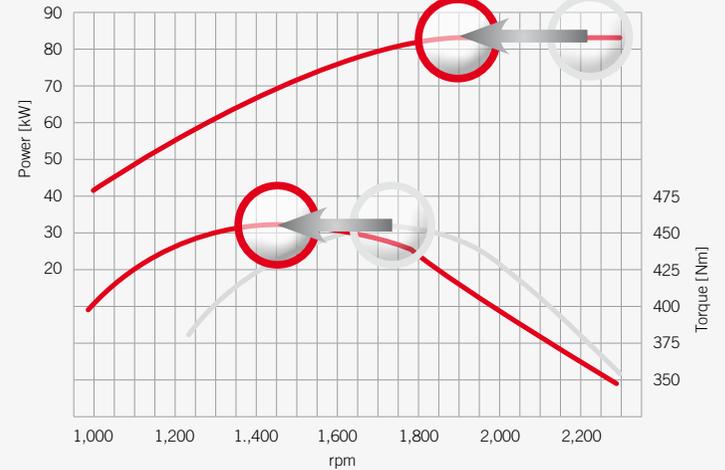

#### FULL POWER EVEN AT 1,800 RPM

Lower engine speed = lower fuel consumption. Through the dedication of the development team, full power output is reached at 1,800 rpm (55 C - 75 C) and 1,900 rpm (85 C - 115 C), resulting in frugal fuel consumption

#### MAXIMUM TORQUE AT 1,500 RPM

With a torque curve optimised at a fuel-saving 1,500 rpm, the new FPT engines deliver maximum torque exactly where it is needed the most.

# TRANSMISSION AND PTO PUTTING POWER TO WORK FOR YOU

The Farmall C transmission is engineered for efficiency and endurance, and many hours of successful operation in the hands of customers around the world have proven its robust reliability. Coupled with heavy duty axles, it allows for higher horsepower ratings and big tyres, achieving massive productivity levels. The PTO is easy to operate with the standard electro-hydraulic engagement and its speeds are aligned with maximum engine output at 1,900 rpm for the most powerful performance.

## TRANSMISSION TO MATCH YOUR REQUIREMENTS

The Farmall C offers a choice of transmissions, so you can pick the one that best meets your needs. At the top end of available specifications is the 24 x 24 two-speed Powershift with Powershuttle and Powerclutch (Farmall 85 C to 115 C only). Alternatively, you can choose the 40 x 40 two-speed Powershift transmission with creep speed. If you are looking for a simpler solution, you can opt for the 12 x 12 Synchroshuttle that is available with mechanical or hydraulic powershuttle.

## RIGHT PTO POWER FOR EVERY TASK

The Farmall C range is available with different PTO versions: 540, 540/540E, 540/1,000\* with ground speed. All cab models feature electro-hydraulic PTO engagement, whilst open platform versions have a mechanical engagement system.

## MAXIMUM POWER, MINIMUM FUEL CONSUMPTION

The 540 or 1,000\* PTO speed is aligned with maximum engine output to transmit maximum power, while the 540 Economy speed is placed where the engine reaches maximum torque for greater fuel efficiency and reduced engine noise.

## THE FARMALL C FOR ALL FARM JOBS

The integral front linkage and 1,000 rpm front PTO options are designed to fit seamlessly and are fully compatible with front loaders. Operation is mechanical and lift capacity is 1,670 kg.

\* 1,000 PTO speed only with the Farmall models 85 C, 95 C, 105 C and 115 C




### ADVANTAGES

- 30 or 40 kph 12x12 with synchro or hydraulic shuttle available for all Farmall C models
- 24 x 24 2-speed powershift with powershuttle available for Farmall 85 C - 115 C.
- Creeper speeds available for greater versatility - up to 40 x 40 speeds with 2-speed powershift
- PTO speed aligned with engine speed - lower fuel consumption, reduced rpm, less noise, fewer vibrations



540 PTO is standard. Optional speeds are 540/540E, 540/1,000\*.

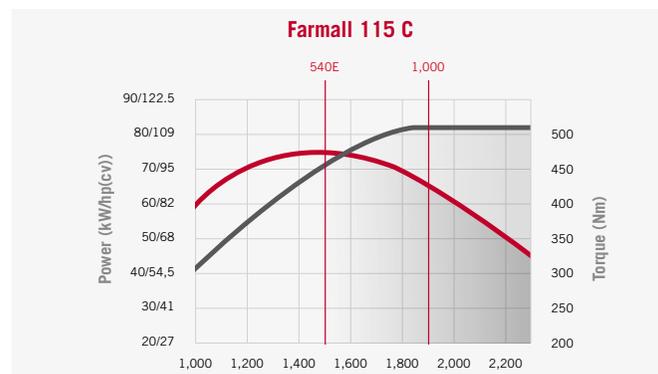

Whether your focus is on power or fuel efficiency, with Efficient Power the PTO delivers the right pace for every task.



Seamlessly integrated front linkage with a lifting power of up to 1,670 kg (Farmall 85 C - 115 C).

# HYDRAULICS RELIABLE HEAVY LIFTER

Farmall C hydraulic systems are designed to be fully in tune with the diverse needs of livestock, dairy, vegetable or municipal customers. Whether operating as a simple yard-scraper tractor, powering a front loader or with a front and rear mower combination, Farmall C has the power and choice of hydraulic connections required to lift, lower extend and retract without putting strain on machine or operator

## REAR HITCH CONTROL

The Farmall 55 C, 65 C and 75 C feature a mechanical linkage operated rear 3 point hitch with a maximum lift capacity of 2,500 kg. Farmall 85 C - 115 C tractors can be specified with the same low effort mechanical system or an electronic system that delivers more precise control. Lift capacity on Farmall 85 C - 115 C is an impressive 3,565 kg.

## POWER WHERE YOU NEED IT

Twin circuit hydraulic systems ensure adequate flow is always available for all needs. On Farmall 85 C - 115 C, a 36 l/min pump serves the steering whilst a 64l/min pump powers the rear hitch and external applications like front loader or front linkage. Tractors can be specified with up to three rear mounted remote valves and one diverter, to power 4 separate circuits through 8 couplers. In addition two mid-mounted hydraulic remote valves operated by an ergonomically positioned joystick are available for convenient and responsive loader operation.



Simple quadrant controls set implement working height.



Electronic controls place precision at your fingertips



Convenient joystick operation of mid mount valves



### ADVANTAGES

- MHC mechanical hitch control is operated by low effort levers
- EHC electronic hitch control enables precision setting of rear implements
- Up to 64l/min of flow is available to power external hydraulic circuits
- Fully integrated front linkage and pto systems extend versatility

# COMPACT AND MANOEUVRABLE EASILY ACCESS ALL AREAS

Farmall C has been designed to fit the exacting demands of your business.. Compact dimensions and tight turning manoeuvrability enable easy access to the traditional barns and livestock sheds around the farmyard without sacrificing any driver comfort. In field applications there is a wide range of track settings and tyre combinations to ensure Farmall C is configured correctly to avoid crop damage.

## COMPACT DIMENSIONS

Cab design on Farmall C has been optimised to enable the tractor to be comfortably be driven through a 2.5 m doorway on 16.9R30 tyres without issue. On the same tyres, Farmall C has an overall width of under 2 m, which means the narrow feed passages of older livestock sheds will present no barriers.

## EASY MANOEUVRABILITY

Low effort steering and a 55 degree turn angle on 4 wheel drive models ensure tight turns are always possible. For the ultimate in manoeuvrability, there is a 2 wheel drive version that is the ideal choice for the ever reliable scraper tractor or as the power unit for a diet feeder wagon.

## PERFECT ALIGNMENT

In vegetable or horticultural applications the track widths can easily be adjusted between 1.4 m to 1.9 m to straddle a wide range of bed grown produce, whether in open fields or under polytunnels.



The right choice for planting and harvesting.



Low doors are no barrier to entry.



Turning radius of 3.82 m (Farmall 55 C - 75 C) and 4.33 m (Farmall 85 C - 115 C).



# DRIVELINE VERSATILE AND SAFE ON ALL GROUNDS

The best engines in the business are no good if you can't put their power down where it's needed – to the ground. That's why Case IH focuses on transmissions, steering, braking and wheel/tyre equipment to ensure that as much as possible of the potential in the engine gets to the ground. A high power-to-weight ratio, robust braking package and a 4 WD system designed without compromise ensure Farmall C tractors are well-placed to meet all farm challenges. A low centre of gravity aids control and improves safety on hilly terrain.

## MAXIMUM TRACTION

The 4-wheel drive axles of the Farmall C range are equipped with a self-locking differential or an electro-hydraulic differential lock (Farmall 85 C to 115 C only). The electro-hydraulic 4 WD is unbeatable when it comes to in-field traction and working on slopes, and the front and rear differential lock will keep you going in loose soils and wet conditions whilst when unlocked this system will deliver zero tyre scrub around the yard.

## TYRES TO SUIT ALL OPERATIONS

There is a wide choice of traction tyres for agricultural use from narrow row crop to wider tyres that spread the load in grassland operations. For Municipal users there are hard wearing industrial block pattern tyres that have a longer operating life and deliver better ride comfort in continual road usage. For amenity users there are turf pattern tyres that are kind to sports pitches.



Efficient fieldwork with maximum traction.



Non aggressive tread pattern tyres are suitable for sports pitch use.



Hard wearing Industrial tyres are ideal for continual road use.

## AFS SUPPORT CENTER



0800 0281 910  
afssupporteur@caseih.com



### ADVANTAGES

- EZ-Guide 250 is the entry-level track guidance system with a lightbar
- EZ-PILOT and FM 750 monitor supports assisted steering
- assisted with T3™ terrain compensation technology
- AFS Support Center dedicated to keep you rolling

# KEEP ON THE RIGHT TRACK

## PRECISE, EFFICIENT, AND PRODUCTIVE!

Enjoy being on the winning track with Case IH guidance systems. Reduce emissions and overlaps automatically, thus saving fuel and labour cost, and manage your input of seeds, fertilisers and chemicals more efficiently than ever before.

## KEEP EVERYTHING IN VIEW

The EZ-Guide 250 is the entry-level track guidance system with a lightbar. This Case IH system has an intuitive user interface and is ready for operation on delivery.

## AUTOMATED STEERING

The EZ-PILOT™ can also be retrofitted to your Farmall C tractor. When engaged, the EZ-PILOT™ turns the steering wheel with an integrated electric motor drive. Precise steering is available at speeds above 3 km/h and maintained even in sloping and rolling landscapes, thus relieving the operator from tiring steering corrections. As the motor is integrated in the steering column, access to all instrument panels and your leg space are completely unobstructed. The system allows for unrestricted manual steering when not engaged. The EZ-PILOT™ is the ideal upgrade package to achieve high accuracy in your fields at an affordable price.

## AFS SUPPORT – SHARED KNOWLEDGE AVAILABLE BY PHONE

Many things in your life will not respect regular opening hours between 9 in the morning and 5 in the afternoon. That is why Case IH provides round the clock technical support – with the right people when and where you need them – to help keep you on track and rolling. Calls to the Support Centre are logged and categorised so all AFS support engineers have access to the inquiry and the resolution. This shared knowledge helps us to provide faster and more accurate responses.



# SERVICEABILITY AND SYSTEM SOLUTIONS

Keep driving! Daily checks and cleaning have been made easier with the new swing-out radiator package, while the air filter is conveniently located for quick inspection. And it's simple to check the oil level, with no need to open the engine hood.

When you buy a Case IH machine, you can be sure not only that you're buying the best product, but also that you've got the best dealer back-up behind you. Case IH dealers can offer advice on selecting and financing the right machine, will ensure they deliver what you need when you need it, and will then continue to back you and your equipment with the service and spare parts supply you'd expect from a name as trusted as Case IH.



## ALL THE PARTS AND SERVICE TO KEEP YOUR EQUIPMENT RUNNING

Find the full line of Case IH parts and components at your local dealer, plus full-service maintenance programmes and industry leading warranties. It is expertise applied by skilled, factory-trained service professionals committed to providing you maximum uptime, season after season.



## AROUND THE CLOCK. AROUND THE COUNTRY

Case IH Max Service is a customer support service that provides 24-hour, seven-day-a-week access to the people, products and parts support needed to keep your operation running during the times most critical to your profitability. Max Service backs up your dealer with every resource available to Case IH, to help maximise uptime and productivity of Case IH equipment and increase your return on investment through access to product experts and 24/7 emergency breakdown assistance.



## AN OPTIMAL FINANCING SOLUTION FOR EVERY INVESTMENT

CNH Industrial Capital is the financing company for Case IH. Our employees are financial experts and have many years of experience in agriculture. We do not only know about Case IH products and the market, we also understand the individual requirements of your operations. Therefore we are always able to offer you a financial solution for your new investments that is tailored specifically to your operational requirements and respective machine usage in the form of loans, rent or leasing. Our most important goal is improving the profitability of your investments! Therefore you can combine every CNH Industrial Capital Financing with Capital accident and breakdown cover, as machine breakdown or repair insurance, in order to exclude risks to your investment and ensure greater planning reliability.

VISIT OUR FANSHOP AT  
[WWW.CASEIH.COM](http://WWW.CASEIH.COM)



MODEL	FARMALL 55 C	FARMALL 65 C	FARMALL 75 C	FARMALL 85 C	FARMALL 95 C	FARMALL 105 C	FARMALL 115 C
<b>ENGINE</b>	FPT	FPT	FPT	FPT	FPT	FPT	FPT
Number of cylinders / Capacity (cm <sup>3</sup> )	4 / 3,400	4 / 3,400	4 / 3,400	4 / 3,400	4 / 3,400	4 / 3,400	4 / 3,400
Type / Emission level	Common Rail Diesel engine, turbocharged and intercooled / EURO-Stage IIIB			Common Rail Diesel engine, turbocharged and intercooled / EURO-Stage III B			
Rated power ECE R120 <sup>3)</sup> @ engine rpm (kW/hp(CV))	43 / 58 @ 2,300	48 / 65 @ 2,300	55 / 75 @ 2,300	63 / 86 @ 2,300	73 / 99 @ 2,300	79 / 107 @ 2,300	84 / 114 @ 2,300
Maximum torque ECE R120 <sup>3)</sup> @ engine rpm (Nm @ rpm)	244 @ 1,500	275 @ 1,500	309 @ 1,500	351 @ 1,500	407 @ 1,500	444 @ 1,500	457 @ 1,500
Torque rise acc. OECD (%)	37	38	36	34	34	35	32
Fuel tank capacity (litres)	90	90	90	115	115	115	115
<b>TRANSMISSION</b>							
12 x 12 Synchroshift with mechanical shuttle, 30 or 40 kph	●	●	●	○	○	○	○
12 x 12 Synchroshift with powershuttle, 30 or 40 kph	○	○	○	○	○	○	○
24 x 24 2-speed Powershift with powershuttle, 40 kph	-	-	-	●	●	●	●
20 x 20 Synchroshift with mechanical shuttle and creeper, 30 or 40 kph	○	○	○	○	○	○	○
20 x 20 Synchroshift with powershuttle and creeper, 30 or 40 kph	○	○	○	○	○	○	○
40 x 40 2-speed Powershift with powershuttle and creeper, 40 kph	-	-	-	○	○	○	○
<b>POWER TAKE OFF</b>							
Engagement type	electro-hydraulic			electro-hydraulic			
Speeds Standard (Option) (rpm)	540 (540/540E)			540 (540/540E or 540/1,000)			540/540 E (540/1,000)
Ground drive optional available for PTO (rpm)	540/540E			540/540E or 540/1,000			
<b>FRONT PTO AND HITCH</b>							
Front PTO 1,000 Speed @ 1,920 rpm	-	-	-	○	○	○	○
Front hitch max. lift capacity (kg)	-	-	-	1,670	1,670	1,670	1,670
<b>FOUR WHEEL DRIVE AND STEERING (DRIVELINE)</b>							
Type	electro-hydraulic			electro-hydraulic			
Min. turning radius <sup>1)</sup> (m)	3.82	3.82	3.82	4.33	4.33	4.33	4.33
<b>HYDRAULIC SYSTEM</b>							
Max. pump flow rate Total (Steering/Rear Hitch & External) (l/min)	84 (36.5 / 47.5)	84 (36.5 / 47.5)	84 (36.5 / 47.5)	100 (36.5 / 63.5)	100 (36.5 / 63.5)	100 (36.5 / 63.5)	100 (36.5 / 63.5)
MHC - Mechanical Hitch Control	●	●	●	○	○	○	○
EHC - Electrical Hitch Control	-	-	-	●	●	●	●
Max. lift capacity / OECD lift capacity through range @ 610 mm (kg)	2,500 / 2,100	2,500 / 2,100	2,500 / 2,100	3,700 / 3,350	3,700 / 3,350	3,700 / 3,350	3,700 / 3,350
Max. number of rear remote valves / mid mount valves	3 mechan. / 2 mechan.	3 mechan. / 2 mechan.	3 mechan. / 2 mechan.	3 mechan. / 2 mechan.	3 mechan. / 2 mechan.	3 mechan. / 2 mechan.	3 mechan. / 2 mechan.
<b>WEIGHTS AND DIMENSIONS <sup>1)</sup></b>							
Approximate shipping weight (kg)	2,880	2,880	2,880	3,600	3,600	3,600	3,600
Permissible total weight standard / heavy duty (kg)	4,500 / -	4,500 / -	4,500 / -	5,300 / 6,000	5,300 / 6,000	5,300 / 6,000	5,300 / 6,000
A: Total height (mm)	2,378	2,423	2,423	2,490	2,490	2,537	2,537
B: Total length (mm)	4,001	4,001	4,001	4,243	4,243	4,243	4,243
C: Total width (across steps) (mm)	1,922	1,922	1,922	1,923	1,923	1,923	1,923
D: Wheel base (mm)	2,102	2,102	2,102	2,235	2,235	2,235	2,235
<b>STANDARD TYRES <sup>2)</sup></b>							
Front	300/70 R20	12.4 R20	12.4 R20	14.9 R20	14.9 R20	13.6 R24	13.6 R24
Rear	13.6 R28	14.9 R30	14.9 R30	16.9 R30	16.9 R30	16.9 R34	16.9 R34

\* To comply with legislation and specification in your country

● Standard Equipment ○ Optional Equipment - Not available

<sup>1)</sup> With standard tyres <sup>2)</sup> Other tyres on request <sup>3)</sup> ECE R120 correspond to ISO 14396 and 97/68/EC

**!** Safety never hurts! Always read the Operator's Manual before working with any equipment. Inspect equipment before using it, and be sure it is operating properly. Follow the product safety signs, and use any safety features provided. This literature has been published for worldwide circulation. The standard and optional equipment and the availability of individual models may vary from one country to the next. Case IH reserves the right to undertake modifications without prior notice to the design and technical equipment at all times without this resulting in any obligation whatsoever to make such modifications to units already sold. Whilst every effort is made to ensure that the specifications, descriptions and illustrations in this brochure are correct at the time of going to press, these are also subject to change without prior notice. Illustrations may show optional equipment or may not show all standard equipment. Case IH recommends **AKCELA** lubricants.

CNH UK Ltd., Cranes Farm Road, Basildon, Essex SS14 3AD

© 2014 CASE IH - [www.caseih.com](http://www.caseih.com) - FARMALL C Series INB BR - Free phone 00 800 22 73 44 00 - Printed in Italy - 12/14 - TP01 - Cod. 14C0001/INB

